

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 February 2005 (10.02.2005)

PCT

(10) International Publication Number
WO 2005/011492 A2

(51) International Patent Classification⁷: **A61B 5/0428**

Stewart [GB/GB]; 4 (3F2) Leamington Road, Edinburgh EH3 9PD (GB).

(21) International Application Number:
PCT/GB2004/003324

(74) Agent: FITZPATRICKS; 1 Blythswood Square, Glasgow G2 4AD (GB).

(22) International Filing Date: 2 August 2004 (02.08.2004)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0317947.0 31 July 2003 (31.07.2003) GB
60/514,909 29 October 2003 (29.10.2003) US

(71) Applicant (*for all designated States except US*): DEL MAR REYNOLDS MEDICAL LIMITED [GB/GB]; 43 Moral Place, Edinburgh EH3 6BT (GB).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): DONALD-BANE,

[Continued on next page]

(54) Title: REDUCED ELECTRODE ELECTROCARDIOGRAPHY SYSTEM

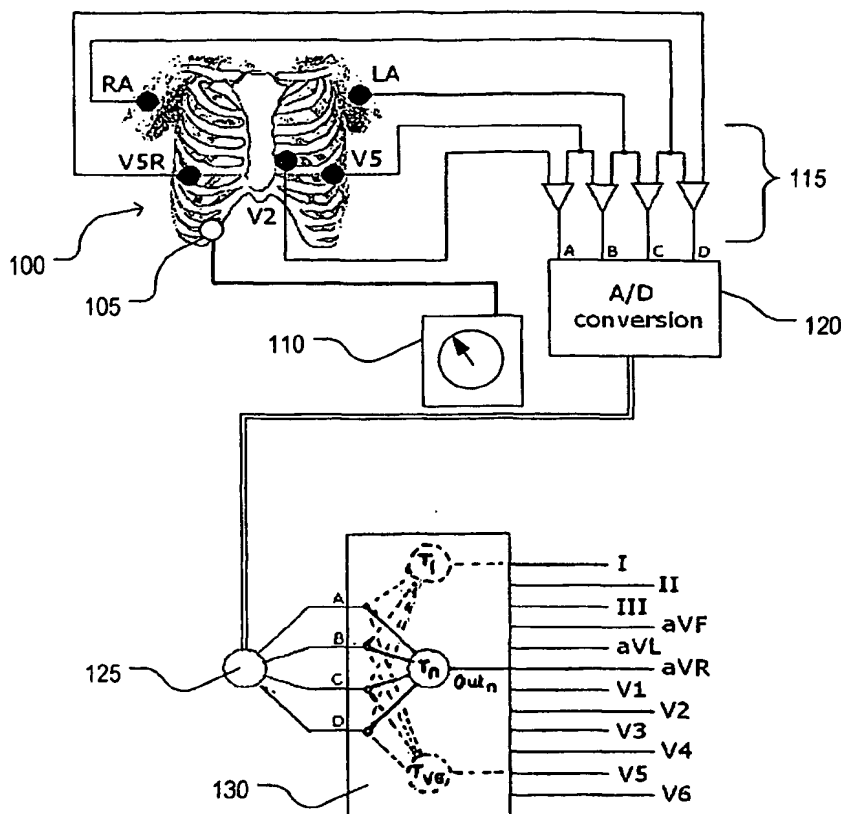

(57) Abstract: Electrocardiographic (ECG) signals such as the standard 12-lead are synthesised from a novel reduced electrode set. Signals are received from a group of electrodes connected to predetermined locations on a human body, and deriving at least one further ECG signal using predetermined transformation(s) (130) on said first set of ECG signals. This forms a desired set of signals. The group of electrodes may comprise the standard 12 lead electrode sites V2 and V5 plus one electrode positioned substantially level with V5 on the right anterior auxiliary line, and a further electrode on each of the right hand side and left hand side of the body. In an alternative arrangement the electrode position V2 is replaced by an electrode position Vc on the sternum directly between the standard electrode sites VI and V2. Also disclosed is a method of improving accuracy of synthesised signals by detecting body posture and modifying the transformations.



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*